


P1:	M-Y266A
	M-266A
P2:	M-Y797A
	M-797A

Customer No: \_\_\_\_\_

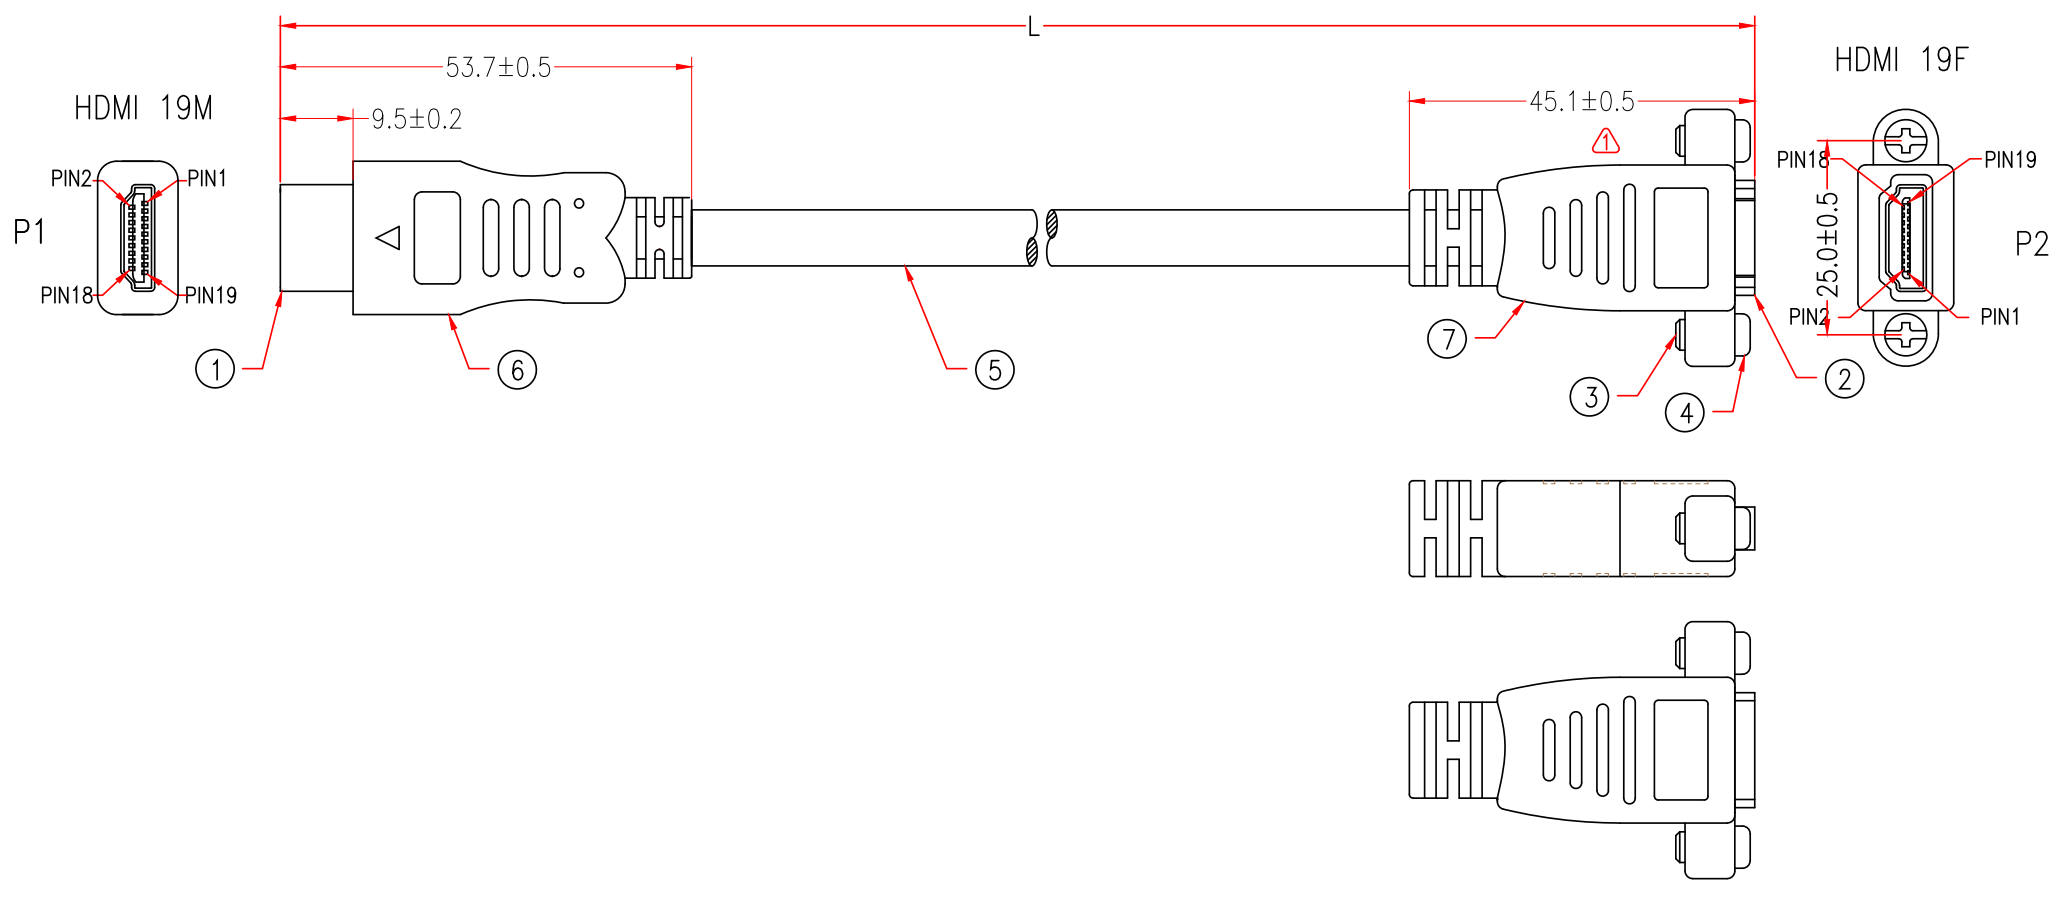


PAGE: 1 OF 2

APPROVED		<b>PCCABLES.COM Inc</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm           ±10mm 201~1000mm       ±20mm 1001 ~1500mm     ±25mm 1501~2100mm     ±30mm 2100mm↑           ±40mm		
CHECKED	HU				
DRAWING	JIANG				
DATE	19/SEP/12	ITEM NO.	<b>73601-73603</b>	UNIT:mm	

P1:	M-Y266A
	M-266A
P2:	M-Y797A
	M-797A

Customer No: \_\_\_\_\_

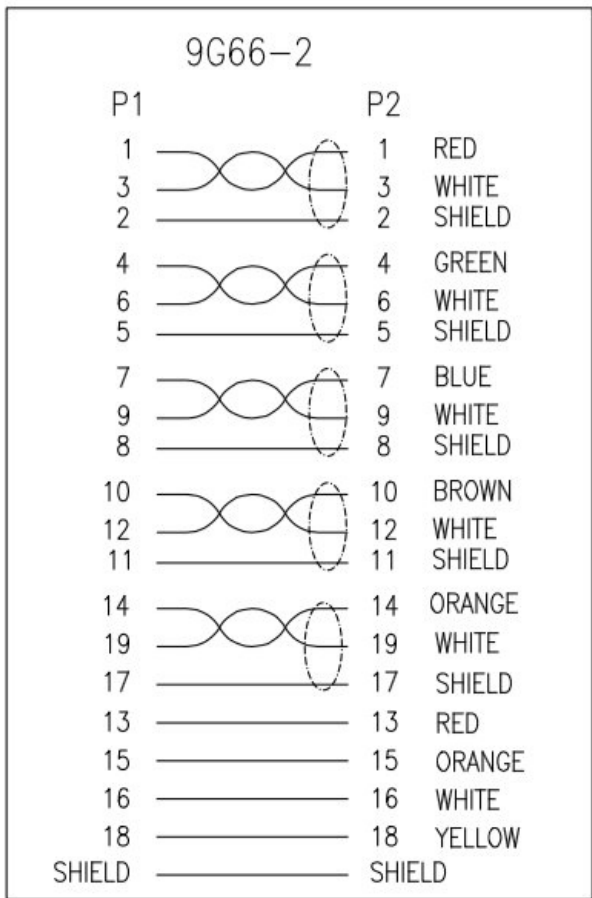

NOTE: All relevant materials are complied with RoHS directive .

7	BLACK HEAT SHRINK TUBE $\phi$ 2.0*5mm	A4HA09-0743	5	M743
	BLACK HEAT SHRINK TUBE $\phi$ 0.8*5mm	A4HA08-0959	5	M959
	BLACK HEAT SHRINK TUBE $\phi$ 2.5*4mm	A4HA39-0959	5	M959
	ALUMINUM FOIL 20*60mm	A6MA01-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
6	BLACK HEAT SHRINK TUBE $\phi$ 2.0*5mm	A4HA09-0743	5	M743
	BLACK HEAT SHRINK TUBE $\phi$ 0.8*5mm	A4HA08-0959	5	M959
	BLACK HEAT SHRINK TUBE $\phi$ 2.5*4mm	A4HA39-0959	5	M959
	ALUMINUM FOIL 33*60mm	A6MA05-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	UL20276 [(28AWG*1Pair+AL+D+MY)*5Pcs+(28AWG*4C)]+AL+DRAIN+AMA BRAID(45%), OD 7.3mm, HDMI1.4, JACKET BLACK, DRAWING No. EAAB2805P2804C-584	H5DG35-0304K09	L-20mm	M304
4	SCREW 5.5*8mm, 4-40#	A6AC01-0095	2	M95
3	HEX-NUT 5*7.7mm 4-40#	A6BC03-0095	2	M95
2	HDMI19 FEMALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, WITH PCB	A1KK53-0024	1SET	M24
1	HDMI19 MALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	A1KK46-0024	1SET	M24

No.	DESCRIPTION		Q'TY	Supplier
APPROVED				Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm$ 10mm 201~1000mm $\pm$ 20mm 1001 ~1500mm $\pm$ 25mm 1501~2100mm $\pm$ 30mm 2100mm $\uparrow$ $\pm$ 40mm
CHECKED	HU			
DRAWING	JIANG			
DATE	19/SEP/12	ITEM NO.	73601-73603	