
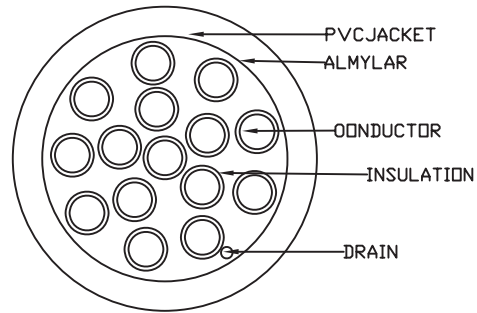


REVISIONS		
REV	DESCRIPTION	APPROVED

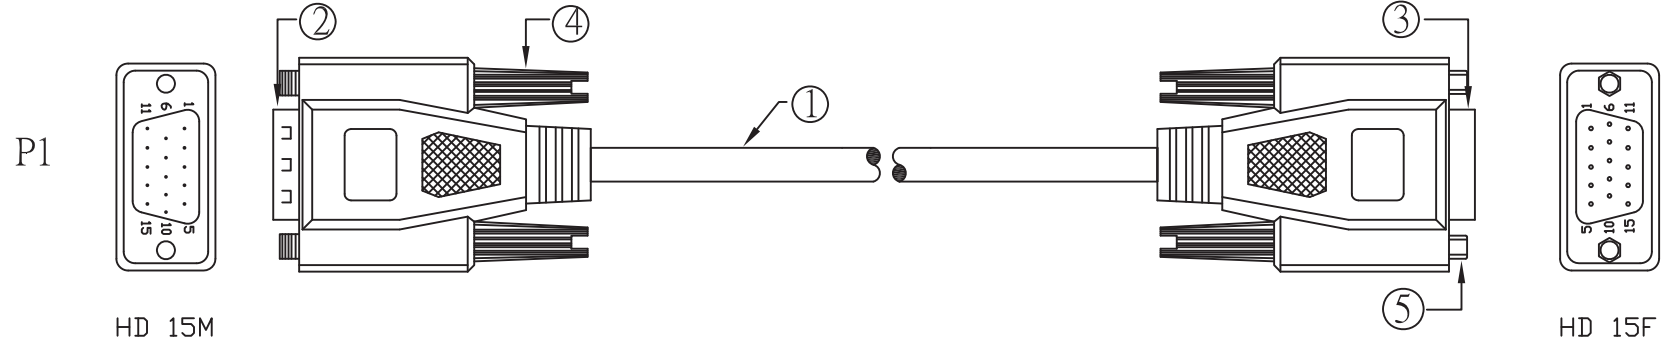

**NOTES:**

- MOLDED CONNECTOR END REQUIREMENTS:  
 A. INNER MOLD USING PE  
 B. ALUMINUM FOIL WRAP TO CONNECTOR  
 C. PVC - 45P PLATINUM GRAY
- CABLE: [28AWG (7/0.12)\*15C+AL/MY +DW(7/0.12)]TIN  
 COLOR: P1 COLOR CODE  
 JACKET: PVC OD=6.0±0.15mm  
 COLOR: PLATINUM GRAY
- FINISHED PRODUCTS LENGTH:  
 (1) LENGTH=305 mm
- ROHS-2 COMPLIANT

PIN		OUTS		COLOR	
HD 15M	HD 15F	COLOR	HD 15M	HD 15F	COLOR
1	1	YELLOW	9	9	ORANGE
2	2	PINK	10	10	PURPLE
3	3	YELLOW/BLACK	11	11	BLUE
4	4	WHITE	12	12	GREEN
5	5	BLACK	13	13	LIGHT-BLUE
6	6	RED / BLACK	14	14	GRAY
7	7	RED	15	15	BROWN
8	8	ORANGE / BLACK	Shell	Shell	

ITEM NO	PART NAMES	Q'TY	REMARK
5	(SCREW)NUT:4.75*6mm NICKEL-PLATING	2PCS	
4	THUMBSCREW: MALE 4*47mm NICKEL-PLATING	4PCS	
3	CONNECTOR:HD15P FEMALE NICKEL-PLATING, INSULATOR COLOR:BLUE	1PCS	
2	CONNECTOR:HD15P MALE NICKEL-PLATING, INSULATOR COLOR:BLUE	1PCS	
1	CABLE:15C+1 28AWG COLOR:BLACK	1PCS	

PRODUCT	HD15PMALE TO HD15P FEMALE	CUSTOMER		DRAWN	Hvon .w	
CUS,NO	130-XXX	VERSION		CHECKED	Jackson H	
DR,NO	SD130-XXX	DRAWN DATE	DEC.21.2002	APPROVERD		